

MANUAL

This manual may not represent the most current version. For the latest version of this document, please visit the [Quandify Resource Center](#). Please note that the content of this manual may differ from the version posted on the Resource Center, and any updates or revisions will be reflected there.

CubicSecure


Smart automatic water shut-off valve.



INTRODUCTION

CubicSecure measures your water flow in real time and detects water leaks immediately. The CubicSecure protects your home from damage caused by micro-leaks and broken water pipes. The compact design makes CubicSecure easy to install and fits in water cabinets.

CubicSecure works completely on its own and does not need any connection to the internet. If, on the other hand, you want to receive notifications about alarms and the opportunity to see your individual water consumption, the product needs to be connected to Wi-Fi. When the device is connected, you can control CubicSecure remotely through our app.



INSTALLATION INFORMATION

CubicSecure is a small device that is easy to install in tight spaces. The device is easily mounted on main incoming water pipes in a villa or apartment. The device is equipped with a knob for manual ball-valve override in the event of a power failure or emergency.

PACKAGE CONTENTS

- 1x CubicSecure
- 1x Mains adapter
- 2x Plane Adapter (LK RSK-1870678)

ARTICLE NUMBER (MODEL VERSION)

LTCS01

Important notice

Security systems such as residential sprinklers and emergency cooling of solid fuel boilers or similar must be connected before the device. If they are installed afterwards, they risk running out of water supply.

Install the device after supplying security systems that require water.


Water filters that are backwashed should be connected first so that their function is not disturbed. The system prevents water damage that may occur after the location of the device.

When installing metal pipes in the distributor cabinet, the pipe must be provided with an electrical protective equalization (earthing) which must be

installed by a qualified electrician if there is not already an earth screw in the cabinet.


To avoid scalding in apartments, two CubicSecures can be paired. Pairing provides a synchronized automatic shut-off between the hot and cold water lines.



DEVICE SETUP

 The CubicSecure must be installed by a plumber according to the *Safe Water Installation* industry regulations.

1.

Make sure that the water pipes are electrically grounded to earth. Correct installation of the device. The arrows show the direction of water flow.




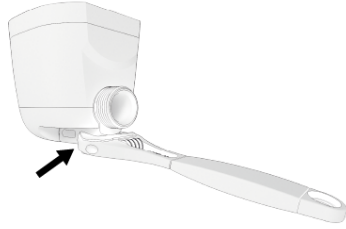
<p>2.</p> <p>The device is equipped with a counterhold on the underside. Use an adjustable wrench on the counterhold. It is also possible to use a screwdriver in the slot to create a counterhold.</p>	
<p>3.</p> <p>The device and incoming water line, (G20 Eurocone G20).</p>	

MOUNTING STEPS

1. Install the device on the incoming water line directly after the water meter's shut-off valve and any non-return valve.
2. Tighten connections without damaging the plastic casing of the device.
3. If you have also purchased CubicDetectors, pair them with your CubicSecure through the Quandify app.

PHYSICAL SETUP
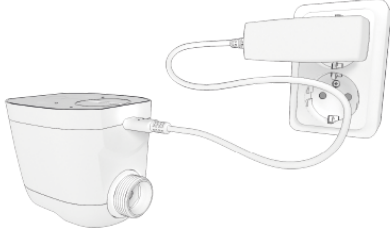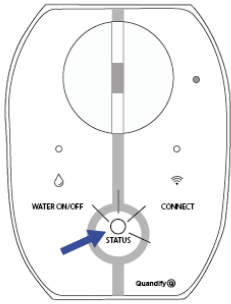
<p>1.</p> <p>Connect power to the device using the micro-USB power adapter included.</p>	
<p>2.</p> <p>Check that the status LED is white. White light indicates that the device is working normally. If no LEDs are lit, check that the wall socket or power adapter is functional.</p>	

HOT/COLD WATER PAIRING

1. Install and start the CubicSecures. One for hot water and one for cold water.
2. Hold down the connect button for 5 seconds on the device installed for cold water. The connect LED starts flashing **yellow** and **blue**.
3. Hold down the connect button for 5 seconds on the device installed for hot water. The connect LED starts flashing **yellow** and **red**. You can also press once on connect to switch the hot/cold water designation.





4. Make sure that the connect LEDs on both devices flash **green** rapidly for about a second.

If pairing was not completed, redo process steps 2 to 4. To delete a pairing, perform a factory reset.

WI-FI SETUP


To be able to follow the device's measurements and alarms remotely via a smartphone, an app and a connection to a Wi-Fi network are required. [Download the app Quandify.](#)

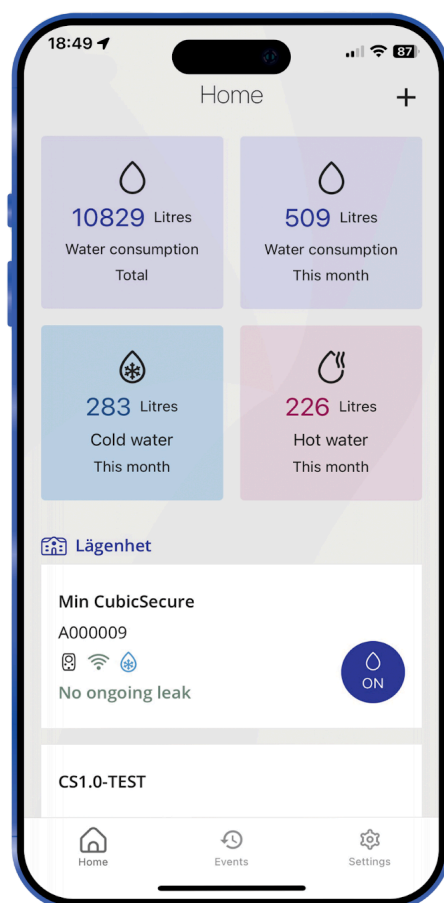



Scan the QR-code to download the app.



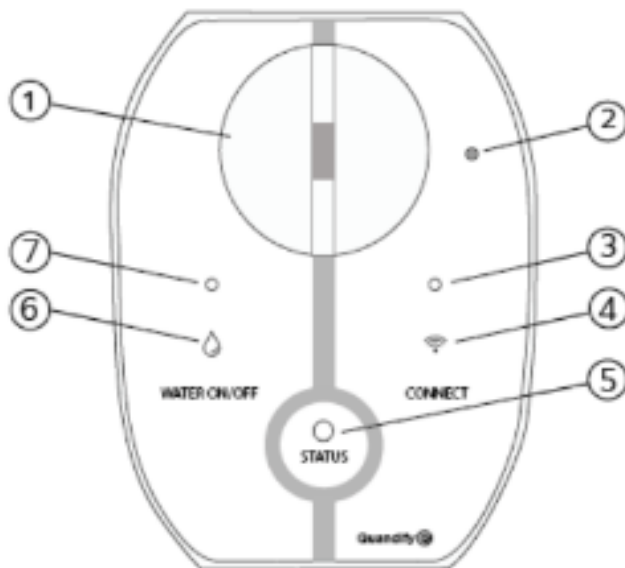


BUTTONS & INDICATIONS





1. Manual valve switch
1. Factory reset button hole
2. Connect LED for pairing
3. Connect button for pairing
4. Status LED
5. On/off button for water
6. On/off LED for water





LED INDICATIONS


Status

LED	LED	MEANING	ACTION
OFF		The device is not powered. Make sure the device is connected to a power source.	Check that the power source is working properly.
WHITE		The device is switched on and working normally with no alarms.	-
WHITE flashing		The device is being updated and some functions are temporarily disabled.	Wait until finished. Do not disconnect the power source.
YELLOW		Leak detection is deactivated OR water pressure is too low.	Press the WATER ON/OFF button to activate leak detection or check that the water system is working properly.
YELLOW flashing		Detected water leakage.	Check for leakages.







GREEN flashing		The device is collecting micro-leakage data on the water pressure and has closed the valve in the meantime.	This process takes up to one minute, after which the device opens the valve again.
RED		The device is not working properly.	Contact technical support.





Water on/off

LED	LED	MEANING	ACTION
OFF		The valve is closed. The water supply/flow is off.	Turn on water supply by pressing WATER ON/OFF
WHITE		The valve is open. The water supply is on.	-
WHITE flashing		Indicates that there is an ongoing water flow where the frequency of the flashing indicates the amount of flow rate.	-
YELLOW		The position of the valve has been changed using the manual knob.	Press the WATER ON/OFF button to

			correct the valve position.
RED		The water pressure is very low or there are air bubbles or no water in the pipe.	Check that the water system is working properly.

Connect

LED	LED	MEANING	ACTION
OFF		Wi-Fi off and not configured.	-
WHITE		Wi-Fi configured and connected to the cloud.	-
WHITE flashing		The device is in hotspot mode for Wi-Fi configuration using the app.	-
YELLOW flashing		Ongoing pairing establishment between two CubicSecures, one for cold water and one for hot water.	-
YELLOW/BLUE flashing	 	Pairing completed between the hot and cold water devices. The connection is made from the cold	-

		water device which flashes YELLOW/ BLUE.	
YELLOW/RED flashing	 	Pairing completed between the hot and cold water devices. The connection is made from the hot water device which flashes YELLOW/RED.	-
GREEN flashing		Hot/cold water pairing has been successful and is completed.	-
RED flashing		No internet or cloud connection.	Check router firewall or redo app setup.

LEAK ALARMS

LEAK TYPE	FLOW RATE [l/h]	
Micro leak	> 0.01	Detected by the valve being automatically closed daily to measure a pressure drop above 0.5 bar for a maximum of 45 seconds.


Medium leak	> 6	The device alarms and shuts off the water after a continuous flow for at least 45 minutes.
Large leak	> 1500	The device alarms and closes the valve after a continuous flow over 1500 l/h for at least 90 seconds.

NOTE: A larger leakage alarm will always override a smaller leakage detection.
Above thresholds can be modified using the mobile application.

FUNCTION CHECK

WATER SHUT-OFF CHECK

1. Press the water ON/OFF button. The LED turns off when the ball valve has completely shut off the water flow.
2. Open a tap. Check that no water comes out of the tap. (Note that if the device is installed on the hot water pipe, cold water may still come out).
3. Press the WATER ON/OFF button. The LED shines WHITE when the valve is fully open. Check that water is now coming out of the open tap. During active waterflow the LED flashes WHITE.

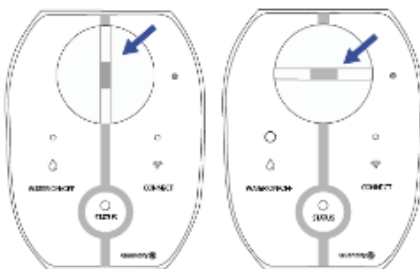

The picture on the left shows an open valve, a closed valve is shown on the right.

MICRO-LEAK DETECTION CHECK

1. Open a tap to simulate a very small leak. A dripping stream of water will suffice.
2. Press the water ON/OFF button to close the valve.

When the valve is closed, the status LED will flash **green** while the pressure sensor scans for small leaks for about 45 seconds.

If the pressure sensor manages to find a leak, the status LED starts flashing **yellow**. If the pressure sensor does not find a leak, redo the steps with a slightly larger leak.

3. Close the tap and press the water ON/ OFF button to open the valve again.

LEAK DETECTION CHECK

1. Open a tap with the valve in the open position.
2. Leave the valve at full flow on the tap for at least 45 minutes.
3. Check that the device emits an alarm and switches off the flow after 45 minutes.
4. Then close the tap and reset the device.


ACKNOWLEDGE ALARMS

- Press the water ON/OFF button once to acknowledge and turn off the alarm.
- Press the water ON/OFF button again to open the valve.

NOTE: *an acknowledgment resets all ongoing leak detections.*

DISABLE LEAK DETECTION

The leak detection can be deactivated if a larger amount of water is needed to e.g. fill a pool or for irrigation. The preset time is 24 hours.



The deactivation of the alarm can be done in the app or manually by holding down the water ON/OFF button for 5 seconds. The LED will turn **yellow** when deactivated. Press again once to re-activate leak detection.

RESET WI-FI

If the connect LED is **red** or off:

- Press the connect button once.

If the connect LED is **white**:

- Restart the device using the power cable and press the connect button once the connect LED is **red**. This can also be done via the app.

FACTORY RESET

1. Unplug the power supply from the device.
2. Insert a paperclip into the hole on the reset button while plugging in the power cable for 3 seconds.
3. Wait for about three minutes. After about three minutes, the device has reset and the LEDs light up again.

NOTE: *you will lose applied firmware updates and hot/cold pairings when doing a factory reset.*

OPERATION

You can access the device data such as water usage, temperature, pressure, valve position and leakage status via the mobile app. When the device is powered on, it performs daily automatic leakage tests and exercises the ball-valve.

After a potential power failure, the device returns to the same mode it was in before the power failure.

SERIAL NUMBER

You can find the 12 characters long serial number on the bottom of the CubicSecure. The data-matrix beside the serial number can also be used using barcode scanners.



DATASHEET

Area of use	Villa, terraced house, apartment
Environment	Indoor (not waterproof)
Pipe connection	G20 Eurocone external thread (DN20)
Climate/environment	5 °C - 30 °C
Storage	-25 °C - 55 °C
Wireless frequency	2.4 GHz, (802.11bgn)
Water temperature	Cold and hot water (0.1°C - 70°C)
Pressure	PN10
Maximum pressure (15min)	16 Bar

Water flow during loss of water pressure, 1 bar (Kvs)	4,6 m ³ /h
Maximum flow rate	4 000 l/h
Start flow rate	6 l/h
Micro-leakage detected	>0.3 bar pressure loss (approx. 0,01 l/h)
Medium sized leakage detected	>6 l/h for at least 45 minutes
Large leakage detected	>1500 l/h for at least 90 seconds
Weight	720 grams
Dimensions	Height: 85, width: 71, length: 110 mm
Power supply	5VDC 2A Power supply, micro-USB cable (EU-plug), 1m cable
Average device power usage	~6 kWh/year (Wi-Fi on)
Default transmission resolution	1 hour (possible to request more frequently)
Valve open/close time	~10 seconds

Flow rate accuracy	Max $\pm 3\%$ error
Water temperature accuracy	Max $\pm 2\%$ error
Water pressure accuracy	Max $\pm 10\%$ error

MAINTENANCE, WARRANTY & SERVICE

If a device is faulty, please contact your authorized distributor for further assistance. All service must be performed by an authorized Quandify service center. If external parts need to be replaced, only original manufacturer spare parts should be used.

When the device has reached the end of its life, it should be sorted as electronics or other electronics and deposited with a recycling center.

If Quandify is responsible for a fault in the product, Quandify has the right to replace the product with either a new or repaired product. The liability period for replacement or repair of a product or spare part does not exceed the liability period for the original product. Quandify is not responsible for faults resulting from accidents, incorrect installation, liquid damage, incorrect care, abuse or other irregular use. Quandify is not responsible for any loss or damage caused by a non-functioning product. Its responsibility is strictly limited to the replacement of the product.

API

For advanced users, you can use the [HTTP API](#) to interact with the device without using the Quandify app.

For more information or support, go to <https://support.quandify.com/en>

